

MARCHEF

广州叁越食品机械有限公司

GUANGZHOU SANYUE FOOD EQUIPMENT CO.,LTD

+86-18816804012 / 0086-02031360549

Yi@Marchef.cn

www.marchef.cn
http://gzmarchef.en.alibaba.com

Building 5, No.3 Meishan Street,Dalong Street,
Panyu District, Guangzhou City



2022

Kitchen Equipment

Product Brochure

CATALOGUE

01/09	Electric Fryer
10/13	Gas Fryer
14/15	Pressure Fryer
16/19	Electric Griddle
20/23	Gas Griddle
24/26	Panini Sandwich Gril
27	Gas BBQ Grill
28	Gas Lava Rock Gril
29/31	Gas Burner

32/33	Electric Salamander
34	Electric Toaster
35	Induction Cooker
36	Electric Crepe Maker/Gas Crepe Maker
37/38	Hot Dog Bun Warmer
39	Hot Dog Roller Grill
40/54	Waffle Maker
55	Popcorn Maker
56	Candy Floss Maker

57/62	Electric Bain Marie
63/64	Chocolate Melter
65/66	Sauce Cheese Warmer
66	Stainless Stee Condiment Dispenser
67	Soup Kettle
68	French Fry Warmer Station
69	Food Heat Lamp
70/71	Food Warmer
72	Cup/Plate Warmer

73	Knife Steriliser
74	Pasta Cooker
75	Water Boiler
76	Coffee Boiler
77/78	Coffee Grinder
79	Milk Shaker
80	Sous Vide
81	Gas Shawarma Grill
82	Food Smoker

Commercial Electric&Gas Fryer



Electric Fryer

- Stainless steel heating tube provide quick heat-up
- Stainless steel 201 structure ensure longer life
- The 392°F (200°C) thermostat internal wiring
- Lid prevents boiling oil from splashing
- Durable Frying pan basket with handle for safe operation
- Non-skid rubber feet prevent slipping
- Easy-to-remove oil pan
- Internal micro-switch disconnects power when element box is removed



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-81	220-240V/50-60Hz	3	10	280*436*310
EF-82		3+3	10+10	570*435*310
EF-83		3+3	20	550*440*320



Easy-to-remove oil pan



Stainless steel heating tube provide quick heat-up



Stainless steel frying basket with handle for safe operation



Safety temperature limiter-Au-tomatic thermal overload shutoff for safety

MODEL EF-81



MODEL EF-82



MODEL EF-83



Electric Fryer

- Stainless steel heating tube provide quick heat-up
- Durable Frying pan basket with handle for safe operation
- Stainless steel 201 structure ensure longer life
- The 392°F (200°C) thermostat internal wiring
- Lid prevents boiling oil from splashing



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-101	220-240V/50-60Hz	3	10	280*430*270
EF-102		3+3	10+10	565*430*270
EF-061		2	6	190*440*280
EF-081		2	8	190*440*320
EF-062		2+2	6+6	190*440*280
EF-082		2+2	8+8	380*440*320

MODEL EF-101



Electric Fryer

- Stainless steel heating tube provide quick heat-up
- Stainless steel 201 structure ensure longer life
- The 392°F(200°C) thermostat internal wiring
- Lid prevents boiling oil from splashing
- Easy-to-remove oil pan



MODEL EF-4L



EF-102



EF-062

Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-4L	220-240V/50-60Hz	2.5	4	217*385*310
EF-6L		3	6	265*420*290
EF-8L		3	8	265*415*330
EF-11L		3	11	275*475*350

MODEL EF-8LV



MODEL EF-4L-2



Rotating fryer head,Easy to clean



Easy-to-remove oil pan



Can block food residue, effectively increase the life of the heating tube

MODEL EF-061



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-4L-2	220-240V/50-60Hz	2.5+2.5	4+4	443*385*310
EF-6L-2		3+3	6+6	550*410*290
EF-8L-2		3+3	8+8	545*410*330
EF-11L-2		3+3	11+11	570*475*350
EF-8LV		3	8	270*485*405
EF-8LV-2		3+3	8+8	550*485*405

Electric Fryer

- Stainless steel heating tube provide quick heat-up
- Durable Frying pan basket with handle for safe operation
- Stainless steel 201 structure ensure longer life
- The 392°F (200°C) thermostat internal wiring
- Lid prevents boiling oil from splashing
- Non-skid rubber feet prevent slipping
- Easy-to-remove oil pan




Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-101V	220-240V/50-60Hz	3	10	279*470*349
EF-131V		3	13	310*485*350
EF-161V		3	16	340*560*380
EF-102V	220-240V/50-60Hz	3+3	10+10	570*470*345
EF-132V		3+3	13+13	630*475*358
EF-162V		3+3	16+16	690*560*380
WT-01	/	/	/	370*450*800
WT-02		/	/	730*450*800



Rotaing fryer head,easy to clean



Stainless Steel frying basket with handle for safe operation

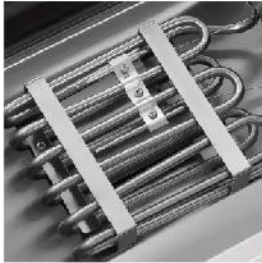

Seamless mold cylinder



Internal micro-switch disconnects power when element box is removed

MODEL EF-101V



MODEL WT-01

Base cabinet for fryer



MODEL EF-102V



Electric Fryer

- Stainless steel heating tube provide quick heat-up
- Durable Frying pan basket with handle for safe operation
- Stainless steel 201 structure ensure longer life
- The 392°F (200°C) thermostat internal wiring
- Lid prevents boiling oil from splashing
- Non-skid rubber feet prevent slipping
- Easy-to-remove oil pan



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-121VW	220-240V/50-60Hz	3	12	290*480*395
EF-141VW		3	14	360*500*340
EF-161VW		5	16	360*500*400
EF-122VW	220-240V/50-60Hz	3+3	12+12	580*480*395
EF-142VW		3+3	14+14	730*500*340
EF-162VW		5+5	16+16	730*500*400
EF-21L	220-380V/50-60Hz	6	21	347*700*510
EF-21L-2		6+6	21+21	675*700*510
EF-21L-2F		9+9	21+21	676*678*1181

MODEL EF-21L-2F



Seamless mold cylinder



Internal micro-switch disconnects power when element box is removed

MODEL EF-121VW



MODEL EF-21L



MODEL EF-21L-2



Electric Fryer

- Stainless steel heating tube provide quick heat-up
- Durable Frying pan basket with handle for safe operation
- Stainless steel 201 structure ensure longer life
- The 392°F (200°C) thermostat internal wiring
- Lid prevents boiling oil from splashing
- Non-skid rubber feet prevent slipping
- Drain valve for easy draining and cleaning



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-161VC	220-240V/50~60Hz	5	16	358*530*915
EF-162VC		5+5	16+16	730*530*890



Rotaing fryer head,easy to clean



Stainless Steel frying basket with handle for safe operation



Seamless mold cylinder



Staubkess Steel heating tube provide quick heat-up

MODEL EF-161VC



MODEL EF-162VC



Electric Fryer



- Stainless steel dry burnable heating tube provide quick heat-up
- Durable Frying pan basket with handle for safe operation
- Stainless steel 201 structure ensure longer life
- The 392°F (200°C) thermostat internal wiring
- Lid prevents boiling oil from splashing
- Non-skid rubber feet prevent slipping
- Easy-to-remove oil pan

MODEL EF-45V



MODEL EF-25



MODEL EF-201S



MODEL EF-201V



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-201S	220-240V/50~60Hz	4.8	30	590*525*915
EF-301S		6	38	606*575*915
EF-45V		7.5	45	590*670*1010
EF-25	380V/50Hz	9	25	715*585*420
EF-201V	220-240V/50~60Hz	4.8	30	590*525*355
EF-301V		6	38	603*575*405

Electric Fryer

- Stainless steel heating tube provide quick heat-up
- Durable Frying pan basket with handle for safe operation
- Stainless steel 201 structure ensure longer life
- The 392°F (200°C) thermostat internal wiring
- Lid prevents boiling oil from splashing
- Non-skid rubber feet prevent slipping
- Drain valve for easy draining and cleaning



MODEL EF-26VC



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-26VC	380V/50Hz	10	21	420*830*1080
EF-26-2		10+10	21+21	800*830*1080

MODEL EF-26-2



Gas Fryer


- Stainless steel heating tube provide quick heat-up
- Durable Frying pan basket with handle for safe operation
- Stainless steel 201 structure ensure longer life
- The 392°F (200°C) thermostat internal wiring
- Lid prevents boiling oil from splashing
- Non-skid rubber feet prevent slipping
- Easy-to-remove oil pan



MODEL GF-71



Model	Pressure	Used Gas	Capacity(L)	Size(mm)
GF-71	2800/2000Pa	LPG/Natural Gas	10	285*470*480
GF-72			10+10	580*470*480
GF-73			20	580*470*480

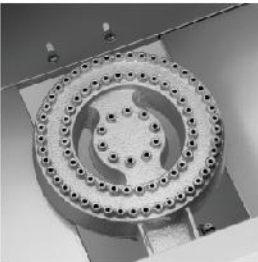

Simple ignition switch, Efficient and fast



Non-skid rubber feet prevent slipping



Simple ignition switch, Efficient and fast



Nickel plating frying basket with handle for safe operation

MODEL GF-72




MODEL GF-73



Gas Fryer

- Units ship natural gas or liquid propane gas (LPG) (please specify when ordering)
- Flameout protection,automatically cut off gas under flame-out.
- Stainless steel 201 structure ensure longer life
- Durable Frying pan basket with handle
- Precision imported thermostat
- With Stainless Steel legs

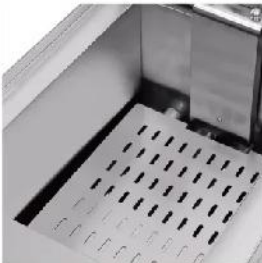

Fully-welded oil tank with safety interlocked



Stainless steel feets ,Safe and firm

MODEL GF-181



Gas Fryer

- Units ship natural gas or liquid propane gas (LPG) (please specify when ordering)
- Flameout protection,automatically cut off gas under flame-out.
- Stainless steel 201 structure ensure longer life
- Durable Frying pan basket with handle
- Precision imported thermostat
- With Stainless Steel legs



Model	Pressure	Used Gas	Capacity(L)	Size(mm)
GF-17H	2800/2000Pa	LPG/Natural Gas	17	505*580*480
GF-17H-2			17+17	980*580*480
GF-23H			23	550*595*1000

MODEL GF-23H



MODEL GF-481



MODEL GF-182



Model	Pressure	Used Gas	Capacity(L)	Size(mm)
GF-181	2800/2000Pa	LPG/Natural Gas	17	320*653*562
GF-182			17+17	640*674*562
GF-481			48	450*680*980
GF-482			48+48	820*680*980



Fully-welded oil tank with safety interlocked




Imported Taiwan thermostat, Precise temperature



Nickel plating frying basket with handle for safe operation

MODEL GF-17H

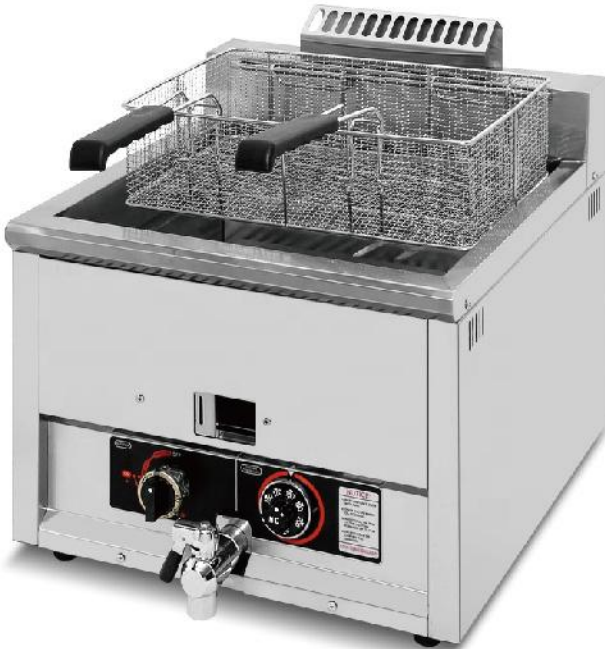

Gas Fryer

- Units ship natural gas or liquid propane gas (LPG) (please specify when ordering)
- Flameout protection, automatically cut off gas under flame-out.
- Stainless steel 201 structure ensure longer life
- Durable Frying pan basket with handle
- Stainless Steel Feet



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
MGF3	2800/2000Pa	LPG/Natural Gas	20	394*779*1137
MGF4			23	394*779*1137
MGF5			42	534*870*1137
MGF4S			23	394*779*1137
MGF5S			42	534*870*1137
GF-3F			28	400*800*1180



MODEL MGF4S



Gas Fryer

- The power of each burner is 30000BTU (8kw)
- Temperature control range 82℃-190℃, melting oil 82℃
- The over-temperature protection temperature is 232℃, the oil temperature exceeds this temperature to cut off the gas
- Stainless steel panel countertops and door components, galvanized side panels and back panels
- 4 inches high adjustable stainless steel feet (caster set optional)



Gas Fryer

- Units ship natural gas or liquid propane gas (LPG) (please specify when ordering)
- Flameout protection, automatically cut off gas under flame-out.
- Stainless steel 201 structure ensure longer life
- Durable Frying pan basket with handle
- Non-skid rubber feet prevent slipping



MODEL GF-3F

MODEL PFE-24



Pressure Fryer

- Low temp&high pressure ensure the food taste and health
- Build-in filtration system filters and returns hot oil ,no need handling of hot oil.
- Computer control panel intelligent control of temperature and time
- High-efficiency heat exchange system produces the lowest average exhaust gas temperatures to save energy.
- Working Pressure 8Psi



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
PFE-24	220~240V/ 50~60Hz	13.5	24	460*960*1230
PFE-600				
PFE-600L				
PFE-500				
PFE-800				
PFG-25	3N~380V/50Hz	13.5	24	460*960*1230
PFG-600				
PFG-600L				
PFG-500				
PFG-800				



PFE-600 GAS PFG-600



PFE-600L GAS PFG-600L



PFE-500 GAS PFG-500



PFE-800 GAS PFG-800

Pressure Fryer

- Low temp&high pressure ensure the food taste and health
- Two button control time and temp,precise control operation
- Stainless steel BODY ensure longer life
- SMALL SIZE Does not take up much space
- Oil drip Easy oil change



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
PFE-16	220-240V/50-60Hz	3	16	380*470*530
PFE-16B			16	380*470*530
PFE-22			22	527*475*565

MODEL PFE-16



Pressure Fryer

- Low temp&high pressure ensure the food taste and health
- Two button control time and temp,precise control operation
- Stainless steel BODY ensure longer life
- SMALL SIZE Does not take up much space
- Oil drip Easy oil change
- Working Pressure 8Psi



MODEL PFE-16B



Pressure Fryer

- Low temp&high pressure ensure the food taste and health
- Two button control time and temp,precise control operation
- Stainless steel BODY ensure longer life
- SMALL SIZE Does not take up much space
- Oil drip Easy oil change
- Working Pressure 8Psi



MODEL PFE-22



Commercial Electric&Gas Griddle



Electric Griddle


- Temperature range of 50 to 300 degrees Fahrenheit adjustable.
- Stainless steel 201 structure ensure longer life.
- Upgrade heating tube,rapid heatingdistribute heat evenly,bring you better cooking experience.
- Non-skid rubber feet prevent slipping.
- Products tested to meet EU standards(CE certifiaction).

OPTION


EG-1  EG-2  EG-3  EG-D 



Model	Voltage	Power(kW)	Size(mm)
EG-818	220-240V/50-60Hz	3	550*430*250
EG-818-2			
EG-818-3			
EG-818D			

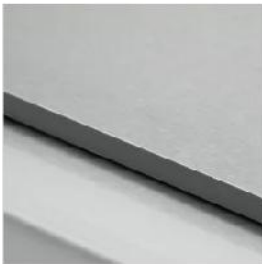

Stainless steel grilling board,Rustproof and easy to clean. Full smooth,Half ribbed half smooth,Full ribbed,Chrome heating plate can be chosen.

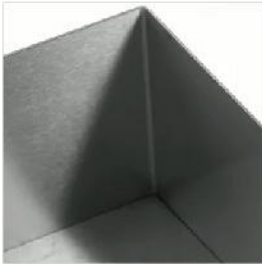

Heighten the apron to prevent oil splashing



Small drawer can collect residue and oil for easy cleaning.



Non-slip feet

MODEL EG-818



MODEL EG-818-2



MODEL EG-818-3



MODEL EG-818D



MODEL EG-360



Electric Griddle

- Temperature range of 50 to 300 degrees Fahrenheit adjustable.
- Stainless steel 201 structure ensure longer life.
- Upgrade heating tube,rapid heating distribute heat evenly,bring you better cooking experience.
- Non-skid rubber feet prevent slipping.
- Products tested to meet EU standards(CE certifiaction).

OPTION

EG-1  EG-2  EG-3  EG-D 

Model	Voltage	Power(kW)	Size(mm)
EG-360	220-240V/50-60Hz	2	360*450*220
EG-820		4.4	730*470*250
EG-548		3	555*475*220
EG-738		4.4	735*525*240



MODEL EG-548



MODEL EG-500



MODEL EG-738



MODEL EG-820



Electric Griddle

- Temperature range of 50 to 300 degrees Fahrenheit adjustable.
- **Stainless steel 201** structure ensure longer life.
- **Upgrade heating tube**,rapid heating distribute heat evenly,bring you better cooking experience.
- **Non-skid rubber feet** prevent slipping.
- Products tested to meet **EU standards(CE certification)**.

OPTION

EG-1  EG-2  EG-3  EG-D  Chrome

MODEL EG-330



Model	Voltage	Power(kW)	Size(mm)
EG-500	220-240V/50-60Hz	3	500*520*330
EG-600		3	600*520*330
EG-750		5	750*520*330
EG-1000		6	1000*520*330
EG-330	220-240V/50-60Hz	3	330*540*245
EG-660		6	660*500*310

MODEL EG-660




MODEL EG-600




MODEL EG-1000



Stainless Steel heating tube provide provide quick heat-up



Stainless Steel heating tube provide provide quick heat-up



Stainless steel grilling board, rustproof and easy to clean.

Electric Griddle



- One **U-shaped burner** per 12" (30 cm)
- Professional safety valve with **flameout protection** makes ignition safer
- **Temperature control range** 93℃-232℃
- 1"thickness grilling board
- **Large front desk**, good for quick cooling
- 4 inch height adjustable **stainless steel feet**
- **Large size oil receiving box** with oil spill hole and inner baffle

OPTION

EG-1  EG-2  EG-3  EG-D  Chrome

MODEL EG-36"



MODEL EG-24"



MODEL EG-48"



MODEL EG-818D




OPTIPN

EG-1  EG-2  EG-3  EG-D 


Model	Voltage	Power(kW)	Size(mm)
EGN-300D	220-240V/50-60Hz	2	300*400*260
EGN-550D		2.4	550*430*260
EGN-750D		4.4	720*460*260
EG-24"	220-240V/50-60Hz	6.7	873*610*394
EG-36"		10.05	873*914*394
EG-48"		13.4	873*1220*394



300℃ Thermostat, 351℃ temperature limiter and indicator light for easy control of grilling plate temperature.



Small drawer can collect residue and oil for easy cleaning.



Heighten the apron to prevent oil splashing

Gas Griddle



- Units ship **natural gas (NPG)** or liquid propane gas (LPG) (please specify when ordering).
- Flameout protection**, automatically cut off gas under flame-out.
- Stainless steel 201** structure ensure longer life.
- Non-skid rubber feet** prevent slipping.
- Products tested to meet **EU standards(CE certification)**.

OPTION

GG-1 GG-2 GG-3 GG-D Chrome

Model	Pressure	Used Gas	Size(mm)
GG-360	2800/2000Pa	LPG/Natural Gas	415*570*370
GG-500	2800/2000Pa	LPG/Natural Gas	555*570*370
GG-600			655*570*370
GG-750			805*570*370
GG-900	2800/2000Pa	LPG/Natural Gas	955*570*370
GG-1000			1000*580*345

MODEL GG-360



MODEL GG-600



MODEL GG-900



Gas Griddle

- Units ship **natural gas (NPG)** or liquid propane gas (LPG) (please specify when ordering).(please specify when ordering).
- Flameout protection**, automatically cut off gas under flame-out.
- Stainless steel 201** structure ensure longer life.
- Non-skid rubber feet** prevent slipping.
- Products tested to meet **EU standards(CE certification)**.

OPTION

GGN-1 GGN-2 GGN-3 GGN-D Chrome



Model	Pressure	Used Gas	Size(mm)
GGN-500	2800/2000Pa	LPG/Natural Gas	500*580*305
GGN-600			600*580*305
GGN-1000			1000*580*305

MODEL GGN-500



MODEL GGN-600



MODEL GGN-1000



Precise control of firepower, simple operation



Conveniently collect food residue and keep it tidy



Small drawer can collect residue and oil for easy cleaning




Can dissipate excess heat



Different gear knobs control fire power



Small drawer can collect residue and oil for easy cleaning



Conveniently collect food residue and keep it tidy



Heighten the apron to prevent oil splashing

Gas Griddle

- per 12 "(30 cm) a U-shaped burner, a normally upright fire
- 3/4" thickness grilling board
- Large front desk, good for quick cooling
- 4 inch height adjustable stainless steel feet
- Large size oil receiving box with oil spill hole and inner baffle



Model	Pressure	Used Gas	Size(mm)
MGG12-M	2800/2000Pa	LPG/Natural Gas	304*873*394
MGG24-M			610*873*394
MGG36-M			914*873*394
MGG48-M			1220*873*394
MGG60-M			1530*873*394

MODEL MGG12-M



MODEL MGG24-M



MODEL MGG36-M



MODEL MGG48-M



MODEL MGG60-M



Commercial Grill & Burner



Panini Sandwich Grill

- Stainless steel dry burnable heating tube provide quick heat-up
- Durable Frying pan basket with handle for safe operation
- Stainless steel 201 structure ensure longer life
- Lid prevents boiling oil from splashing
- Non-skid rubber feet prevent slipping
- Easy-to-remove oil pan

OPTION

 PG-A: Full Ribbed

 PG-B: Full Smooth

 PG-C: Half smooth Half Ribbed




MODEL PG-812A



MODEL PG-812D



Specialized hinge ensures complete contact and uniform cooking



Removable grease tray it can be removed quickly for cleaning



Humanization Hot - proof handle easy to operate



Cast iron plate non-stick layer, high temperature resistance, easy cleaning

MODEL PG-811C



MODEL PG-813A



MODEL PG-813B




MODEL GG-1102A



Gas BBQ Grill

- Units ship **natural gas (NPG)** or **liquid propane gas (LPG)** (please specify when ordering).
- Flameout protection**,automatically cut off gas under flame-out.
- Stainless steel 201 structure** ensure longer life.
- Upgrade heating tube**,distribute heat evenly,bring you better cooking experience.
- Non-skid rubber feet** prevent slipping.
- Each machine undergoes **air leak test** before delivering to ensure customer safety.

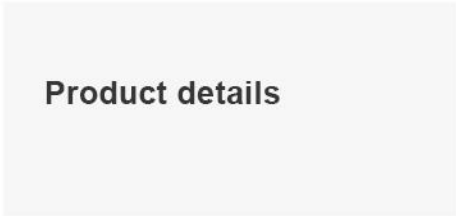

Product details



Model	Bumer	Heat Input(kw)	Used Gas	Size(mm)
GG-1102A	2pcs	10	LPG Or Natural Gas	700*560*310
GG-1103A	3pcs	10		
GG-1102B	2pcs	10		
GG-1103B	3pcs	10		

MODEL GG-1103A



MODEL GG-1102B



MODEL GG-1103B



Gas Lava Rock Grill

- One **U-shaped burner** per 12" (30 cm)
- Normal open flame **manual ignition**
- Large front desk**, good for quick cooling
- 4 inch height adjustable **stainless steel feet**
- Full size **slag tray**



Model	Pressure	Used Gas	Power(kW)	Size(mm)
MGL12-M	2800/2000Pa	LPG/Natural Gas	10.3	415*570*370
MGL24-M			20.6	610*740*385
MGL36-M			30.9	910*740*385
MGL48-M			41.2	1210*740*385



MODEL MGL12-M



MODEL MGL24-M



MODEL MGL48-M



MODEL MGL36-M



MODEL GB-1



Gas Burner

- Stainless steel 201 structure ensure longer life
- Flameout protection,automatically cut off gas under flame-out.
- Electronic ignition needle, high-quality combustion valve
- Units ship natural gas or liquid propane gas (LPG) (please specify when ordering)
- Control the flame easily by adjusting the damper
- Stainless steel feet, safe and firm



MODEL GB-2



MODEL MGB24-M



MODEL MGB12-M



MODEL MGB36-M



MODEL MGB12-MF



MODEL MGB24-MF



MODEL MGB36-MF



Model	Pressure	Used Gas	No. of Burners	Size(mm)
GB-1	2800/2000Pa	LPG/Natural Gas	1	650*456*660
GB-2			2	1350*456*660
MGB12-M			2	308*738*330
MGB24-M			4	610*738*330
MGB36-M			6	915*738*330
MGB12-MF			2	308*738*850
MGB24-MF			4	610*738*850
MGB36-MF			6	915*738*850

Gas Burner

- Stainless steel 201 structure ensure longer life
- Flameout protection,automatically cut off gas under flame-out.
- Electronic ignition needle, high-quality combustion valve
- Units ship natural gas or liquid propane gas (LPG) (please specify when ordering)
- Control the flame easily by adjusting the damper
- Stainless steel feets, safe and firm

OPTIPN



Model	Pressure	Used Gas	No. of Burners	Size(mm)
GB-2T	2800/2000Pa	LPG/Natural Gas	2	700*450*400
GB-2H			2	670*400*400
GB-3T			3	1040*450*400
GB-4T			4	700*790*400

Product details

MODEL GB-4T



MODEL GB-2H



MODEL GB-2T



MODEL GB-3T



Electric Salamander

- U-shaped heating tube provide more quick and evenly heat-up
- Antirust SS201 structure ensure longer life
- Green light indicates power on; Orange light indicates heating
- Lifting design can be adjusted up and down at will, which is convenient for roasting delicious food.
- Heat dissipation hole can efficiently thermally heat and lengthen service life
- Large area barbecue location easily deal with the large passenger flow, so that customers will not wait long.
- Non-skid rubber feet prevent slipping



Model	Voltage	Power(KW)	Size(mm)
ES-450L	220-240V/50-60Hz	2.8	450*520*520
ES-600L		4	600*520*520
ES-800L		5.6	800*520*520

Easily adjust the temperature
50-300 °C

Push-pull tray and cooking
grate,easy to use and
clean,safer

Effectively prevent burns,sim-
ple and convenient operation

6 sides heat dissipation,built-in
thermal insulation layer,circu-
lating heating, Safer and more
energy-asving

MODEL ES-450L



MODEL ES-600L



Electric Salamander

- U-shaped heating tube provide more quick and evenly heat-up
- Antirust SS201 structure ensure longer life
- Green light indicates power on; Orange light indicates heating
- Lifting design can be adjusted up and down at will, which is convenient for roasting delicious food.
- Heat dissipation hole can efficiently thermally heat and lengthen service life
- Large area barbecue location easily deal with the large passenger flow, so that customers will not wait long.
- Non-skid rubber feet prevent slipping

MODEL ES-360 / ES-370



MODEL ES-938



MODEL ES-936



Model	Voltage	Power(KW)	Size(mm)
ES-936	220-240V/50~60Hz	2.5	610*330*265
ES-937		4	790*440*450
ES-938		3	580*400*360
ES-360		2.4	440*300*290
ES-370		3.6	440*300*405

Model	Voltage	Power(kW)	Size(mm)
MET-150	220-240V/50~60Hz	1.5	288*418*387
MET-300		2.45	368*418*387
MET-450		2.6	468*418*387
ET-4		1.8	315*270*220
ET-6		2.5	468*418*387



MODEL MET-450




Electric Toaster

- Antirust SS201 structure ensure longer life
- U-shaped heating tube provide more quick and evenly heat-up
- The design of front and back trays can be fully automatic bagging
- Heat sink can stabilize the internal temperature and prevent overheating
- Clear operation panel, simple and convenient


MODEL MET-300



MODEL ET-6

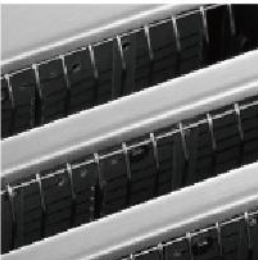

can meet the different thickness of bread baking

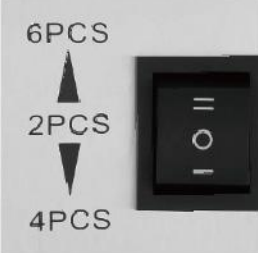

Simple operation, can choose the number of bread baking



Jump up and down pressure bar, simple and convenient

Induction Cooker



MODEL IC-35A



- Thick stainless steel body, oil-resistant, temperature-resistant and high-load-bearing
- The pure copper coil heats evenly and the firepower is super fierce
- Intelligent imported electronic components, energy saving and power saving
- Black crystal glass surface, high temperature resistance, non-slip and wear-resistant

Model	Voltage	Power(kW)	Size(mm)
IC-1	220-240V/50-60Hz	3.5	350*430*105
IC-35A			355*440*120
IC-35B			355*440*120
IC-50A		5	355*440*120
IC-50B			355*440*120



IC-50A



IC-50B




IC-35B



Knob control, convenient operation



Can watch the temperature at any time

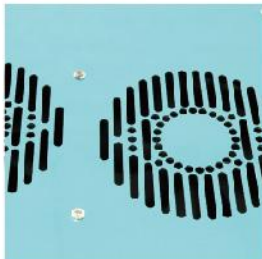

Can protect components and improve overall life

MODEL IC-1



Electric Crepe Maker

- External shell and grease collector tray are stainless steel.
- Over-heat temperature controller for safety using.
- Grill temperaturesrills are designed may be set for different uses at the same time (double unit).
- Equipped with a rotary button for precise temperature control.

Model	Voltage	Power(KW)	Size(mm)
EC-1	220-240V/50-60Hz	3	450*490*220
EC-2		3+3	890*490*220
EC-1N		3	440*440*200



MODEL EC-2



MODEL EC-1



MODEL EC-1N



Gas Crepe Maker

Model	Pressure	Used Gas	Size(mm)
GC-1	2800/2000Pa	LPG/Natural Gas	450*490*260
GC-2			890*490*260



Gas regulator to control the fire from Min to Max



Non-stick cooking plate

MODEL GC-1



MODEL GC-2



Hot Dog Bun Warmer

- Made of durable,easy care stainless steel
- With temperature controls holding 35-100 degress, it can cook,heat and hold freank furters and buns/bread rolls ready for customers
- Stainless steel bun warmers
- Brand now in box, no servicing and no installation required, just plug in and start to service
- Wet heat stainless pot



Model	Voltage	Power(kW)	Size(mm)
HDW-1	220-240V/50~60Hz	0.45	320*290*410
HDW-2		0.5	390*290*410
HDW-3		0.525	540*290*410
HDW-4		0.55	540*290*410
HDW-6		0.6	660*290*410
HDW-H4		0.2	305*300*315


MODEL HDW-H4



MODEL HDW-1



Adjustable 5 levels tempera-
ture thermostat



Use high-quality high-tem-
perature materials to prevent
burns



Waterproof heating, heat
preservation faster and more
uniform



Can accelerate the heating
speed of food, easy to use

MODEL HDW-2



MODEL HDW-3



MODEL HDW-4





MODEL HDW-6



Hot Dog Roller Grill

- Commercial quality stainless steel construction
- Non-stick rollers rotate 360 degrees for even cooking
- Cooks a variety of foods including franks, sausages, hot links and even breakfast sausages
- Removable and easy-to-clean stainless steel drip tray

Model	Voltage	No. of Rollers	Power(kW)	Size(mm)
HD-5	220-240V/50~60Hz	5	1	560*320*230
HD-7		7	1.4	560*385*200
HD-9		9	1.8	560*460*200
HD-5C		5	1	600*280*460
HD-7C		7	1.4	600*320*460
HD-9C		9	1.8	600*440*375
HDC-5		5	1	585*270*380
HDC-7		7	1.4	585*345*405
HDC-9		9	1.8	585*415*405
HDC-11		11	2.2	585*505*420

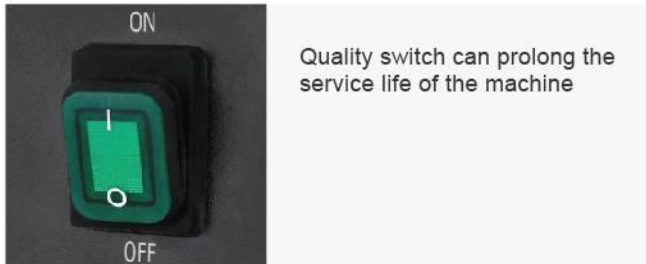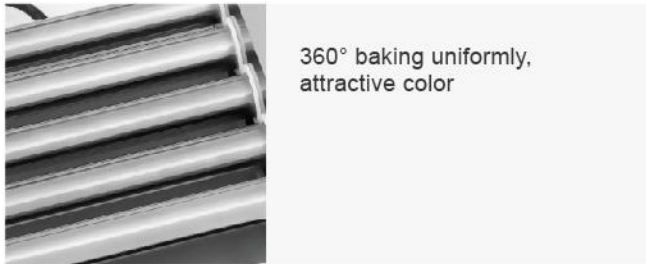

MODEL HD-5



MODEL HD-7C



MODEL HDC-7



Commercial Waffle Maker



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.



Model	Voltage	Power(KW)	Size(mm)
CB-1	220-240V/50~60Hz	1	255*380*270
CB-2		1+1	520*380*270
WF-2207		1	255*380*270
WF-2207-2		1+1	520*380*270



Non-stick Cooking grids provide variety of waffle shape



Cool-touch Handle
Convenient cool-touch handles ensure safety



Thermostat
Easily adjust the temperature 50-300°C



Timer
Set a time 0-5mins for reminder

MODEL CB-2



MODEL CB-1



MODEL WF-2207-2



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WFR: Reversible WF-D: Digital control panel



Model	Voltage	Power(kW)	Size(mm)
WF-1	220-240V/50~60Hz	1	255*380*270
WF-2		1+1	520*380*270
WF-6		1.4	225*420*290
WF-6D		1.1	500*250*260
WFR-1		1.3	410*305*245
WFR-2		1.3+1.3	500*445*260
WF-1RH		1.2	410*305*245



WFR-1



WF-2



WF-6



WF-6D



Non-stick cooking grids provide variety of waffle shapes



Convenient cool-touch handles ensure safety



Quality switch can prolong the service life of the machine

MODEL WF-1RH



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WF-D: Digital control panel



Model	Voltage	Power(kW)	Size(mm)
WF-2204	220-240V/50~60Hz	2.2	445*345*240
WF-2206		1.75	300*400*230
WF-2205D		2.2	445*345*240
WF-2207D		2.2	320*490*270
WF-2208D		2.2	445*345*240
WF-2203		1.75	410*305*240



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WF-D:Digital control panel

WF-J:Mirror



Model	Voltage	Power(kW)	Size(mm)
WF-2210	220-240V/50~60Hz	1.75	410*305*240
WF-2210J		1.75	410*305*240
WF-2210-2		1.75+1.75	620*371*250
WF-2210D-2		1.75+1.75	620*371*250
WF-115		1.5	380*270*235
WF-2212		1.75	250*355*235



MODEL WF-2207D



MODEL WF-2203



MODEL WF-2210J



MODEL WF-2210-2



MODEL WF-2208D



MODEL WF-2205D



MODEL WF-2204



MODEL WF-115



MODEL WF-2212



MODEL WF-2210D-2



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WF-D:Digital control panel
WF-CC:Upper hot plate



Model	Voltage	Power(kW)	Size(mm)
WF-4	220-240V/50~60Hz	2	250*380*245
WF-6D		2	250*380*245
WF-7XC		1.75	410*305*240
WF-7CC		1.75	410*305*240
WF-10		1.55	390*340*245



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WF-J:Mirror



Model	Voltage	Power(kW)	Size(mm)
WF-007J	220-240V/50~60Hz	1.1	260*400*200
WF-009J		0.9	290*420*180
WF-215		1.5	310*440*235
WF-113		1.55	390*340*245
WF-114		1.55	390*340*245



MODEL WF-6D



MODEL WF-7XC



MODEL WF-007J



MODEL WF-113



MODEL WF-7CC



MODEL WF-10



MODEL WF-215



MODEL WF-114



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WF-J:Mirror

Model	Voltage	Power(kW)	Size(mm)
WF-2209	220-240V/50~60Hz	1.75	410*305*240
WF-2211		1.5	330*390*260
WF-117		1.55	360*340*245
WF-118		1.55	390*340*245
WF-216		1.5	390*340*245
WF-219		1.5	390*340*245
WF-005J		1.34	460*260*200



MODEL WF-2209

Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WF-D:Digital control panel WF-J:Mirror

Model	Voltage	Power(kW)	Size(mm)
WF-210	220-240V/50~60Hz	1.55	360*340*245
WF-223		1.55	390*340*245
HT-228		1.55	390*340*245
WF-5DM	220-240V/50~60Hz	1.55	360*330*245
WF-6DM		1.55	360*330*245
WF-12DM		1.55	360*330*245
WF-003J		1.1	485*250*210
WF-002J	220-240V/50~60Hz	1.55	470*255*160
WF-13J		1.3	460*255*180



MODEL WF-210

MODEL WF-2211



MODEL WF-117



MODEL WF-118



MODEL WF-223



MODEL WF-228



MODEL WF-12DM



MODEL WF-216



MODEL WF-219



MODEL WF-005J



MODEL WF-5DM



MODEL WF-003J



MODEL WF-13J



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.



Model	Voltage	Power(kW)	Size(mm)
WF-11	220-240V/50~60Hz	1.75	410*305*240
WF-14		1.75	410*305*240
WF-2240		1.75	410*305*240
WF-2247		2.6	362*382*240
WF-2248		1.75	410*305*240



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.



Model	Voltage	Power(kW)	Size(mm)
WF-25	220-240V/50~60Hz	0.85	320*300*180
WF-36		1	485*395*240
WF-50		3	550*600*180
WF-100		3	670*670*220
WF-2249		0.85	320*340*180
WF-2245		0.85	375*300*170
WF-2246		3	550*600*180



MODEL WF-2240



MODEL WF-14



MODEL WF-2247



MODEL WF-2248



MODEL WF-25



MODEL WF-50



MODEL WF-100



MODEL WF-2249



MODEL WF-2245



MODEL WF-2246



MODEL WF-315



Model	Voltage	Power(kW)	Size(mm)
WF-315	220-240V/50~60Hz	1.4	350*390*190
WF-442		2	350*525*307
WF-445		2	500*400*230
WF-1110		1.5	380*380*260
WF-1110D		1.5	380*380*260

WF-D:Digital control panel

Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.



Model	Voltage	Power(kW)	Size(mm)
WF-1114	220-240V/50~60Hz	1.5	380*380*260
HT-1114D		1.5	380*380*260
WF-443		1.5	380*380*260
WF-443D		1.5	380*380*260

WF-D:Digital control panel

MODEL WF-1110D



MODEL WF-442



MODEL WF-1114



MODEL HT-1114D



MODEL WF-1110



MODEL WF-445



MODEL WF-443



MODEL WF-443D



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WF-D:Digital control panel



Model	Voltage	Power(kW)	Size(mm)
WF-1101A-D	220-240V/50-60Hz	3	380*550*260
WF-1101A		3	380*550*260
WF-1103A		1.5	380*380*260
WF-1103A-D		1.5	380*380*260
WF-1103B		2	440*425*285
WF-1106		1.5	380*380*260
WF-1106D		1.5	380*380*260
WF-1109		3	600*380*300

MODEL WF-1101A-D



MODEL WF-1103A



MODEL WF-1106



MODEL WF-1101A



MODEL WF-1106D



MODEL WF-1109



MODEL WF-1103A-D



MODEL WF-1103B



Popcorn Maker

- Antirust stainless steel 201 structure ensure longer life
- Non-skid rubber feet prevent slipping
- Explosion-proof glass door is detachable, with good light transmission, high temperature resistance and sanitation



Model	Voltage	Power(kW)	Size(mm)
PC-801	220-240V/50-60Hz	1.4	500*360*680
PC-802		1.4	560*420*750
PC-06B		1.35	500*360*680
PC-08B		1.35	500*400*710
PC-808A		2.9	860*420*730
PC-803		1.4	920*370*1530
DH-11		0.4	450*450*570

MODEL PC-802



PC-06B



PC-808A



DH-11

Candy Floss Maker

- Stainless Steel heating tube provide more quick heat-up
- Antirust stainless steel 201 structure ensure longer life
- Stainless steel tray is large and strong to prevent the sugar wire from being turned out
- Stainless steel sugar spoon, convenient to put sugar, safe and sanitary



Model	Voltage	Power(kW)	Size(mm)
ECF-520	220-240V/50-60Hz	1.08	520*520*500
ECF-520S		1.03	520*520*415
ECF-520C		1.08	520*750*910
ECF-720		1.08	720*720*500
ECF-720C		1.08	960*720*895

MODEL ECF-520



ECF-520S



ECF-720



ECF-720C



- Easy to use and simple to operate
- Can keep warm and show the food best looking
- Rotate to heat the corn evenly to increase the blasting rate

MODEL PC-803



- High-efficiency motor, stable speed, high working efficiency
- Can dissipate excess heat
- Use simple and convenient switches, control whatever you want

MODEL ECF-520C



Electric Bain Marie



Electric Bain Marie

- Cook and preserve the product at a food-safe temperature.
- Durable stainless steel food well.
- Reheat food and keep it fresh.
- GN Pan with different sizes.



Model	Voltage	Power(kW)	Size(mm)
BMH-1	220-240V/50~60Hz	0.15	235*210*320
BMH-2		0.3	235*415*320
BMH-3		0.45	235*620*320
BMH-4		0.6	420*415*320
BM-S2		1.2	577*340*240

MODEL BMH-4



BMH-1



BMH-2



BMH-3



5 levels adjustable temperature thermostat



Easy to clean the residual water



Waterproof heating, heat preservation faster and more uniform

MODEL BM-S2



MODEL BM-1/1




Electric Bain Marie

- Cook and preserve the product at a food-safe temperature.
- Durable stainless steel food well.
- Reheat food and keep it fresh.
- GN Pan with different sizes.



Model	Voltage	Power(kW)	Size(mm)
BM-1/1	220-240V/50-60Hz	1.2	577*340*240
BM-1/2			577*340*240
BM-1/3			577*340*240
BM-1/4			577*340*240
BM-1/6			577*340*240
BM-2T	220-240V/50-60Hz	1.5	355*565*240
BM-4T		1.5	685*565*240
BM-6T		1.8	1030*565*240
BM-8T	220-240V/50-60Hz	2	1375*565*240
BM-N		1.2	577*340*240
BM-W		1.2	577*340*240

OPTION

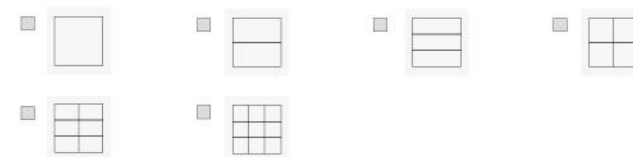

BM-1/6



BM-N



BM-W

MODEL BM-4T



MODEL BM-6T



Thermostat has stainless steel anti-collision protection



Quality switch can prolong the service life of the machine



Different size of GN Pan

Electric Bain Marie

- Cook and preserve the product at a food-safe temperature.
- Durable stainless steel food well.
- Reheat food and keep it fresh.
- GN Pan with different sizes.



OPTION



Model	Voltage	Power(kW)	Size(mm)
BM-3	220-240V/50-60Hz	1	910*350*320
BM-4			1175*350*320
BM-5			1440*350*320
BM-3D			950*365*330
BM-4D			1215*365*330
BM-5D	220-240V/50-60Hz	1	1485*365*330
BM-6D			1750*365*330

Model	Voltage	Power(kW)	Size(mm)	GN pans
BM-M20-4	220V/50Hz	1.3	1175*460*700	4X
BM-M20-5		1.8	1450*460*700	5X
BM-M20-6		1.8	1725*460*700	6X
BM-M21-3		1.3	1080*660*700	3X
BM-M21-4		1.8	1415*660*700	4X
BM-M21-5		1.8	1750*660*700	5X
BM-M21-6		1.8	2085*660*700	6X



Class Cover Baffle Protect food safety and hygiene




Water Tap Easy to drain and clean



Digital temperature display
Smart display temperature

MODEL BM-3

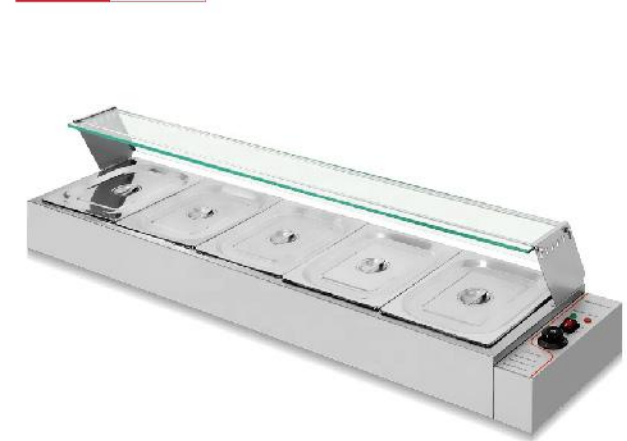

MODEL BM-M20-4



MODEL BM-3D



Electric Bain Marie

- Glass shelf and cabinet
- Overall stainless steel structure
- Adjustable feet
- GN pans: 1/1x150mm

OPTION

- A

Cabinet
- C

Class Cover
- D


- E



B

Without Cabinet

MODEL BM-M01-4 A C D



MODEL BM-M05-4 B



MODEL BM-M09-4 B



N=BM-M01 / BM-M02 / BM-M03 / BM-M04

Model	Voltage	Power(kW)	Size(mm)	GN pans
N-3	220V/50Hz	2	1120*670*800+600	3X
N-4		2	1455*670*800+600	4X
N-5		2	1790*670*800+600	5X
N-6		3	2125*670*800+600	6X



MODEL BM-M02-4 A C E



MODEL BM-M03-4 A



MODEL BM-M04-4 B



Electric Bain Marie

- Cabinet and pipe shelf
- Overall stainless steel structure
- Four casters 100mm dia. with 2 brakes
- With double side pipe shelf



Model	Voltage	Power(kW)	Size(mm)	GN pans
BM-M10	220V/50Hz	2	1450*1240*870	a1
BM-M11		2	1100*1240*815	a2
BM-M12		2	1780*1240*840	a3
BM-M13		3	2125*1240*815	a4

a1=2x(1/1x150mm) + 4x(1/2x150mm) a2=2x(1/1x150mm) + 2x(1/2x150mm)
a3=4x(1/1x150mm) + 2x(1/2x150mm) a4=4x(1/1x150mm) + 4x(1/2x150mm)

OPTION



BM-M11



BM-M12



BM-M13

Electric Bain Marie

- Abinet and Lamps
- Overall stainless steel structure
- Adjustable feet
- GN pans: NX(1/1x150mm)

MODEL BM-M07



MODEL BM-M08




Model	Voltage	Power(kW)	Size(mm)	GN pans
BM-M07	220V/50Hz	4	1500*1400*850+700	b1
BM-M08		3	1600*800*850+700	b2

b2=8x(1/1x150mm) b2=2x(1/1x150mm) + 4x(1/2x150mm)

Chocolate Melter

- Stainless steel 201 structure ensure longer life
- Stainless steel heating tube provide quick heat-up
- Digital display panel, more scientific and fashionable
- Can realize automatic constant temperature
- Thick high-quality chocolate pan, humanized design

OPTION

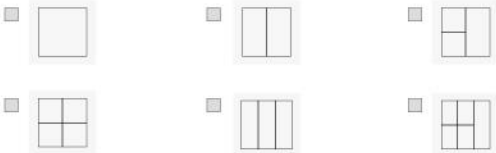

Model	Voltage	Power(kW)	Capacity	Size(mm)
CMM-4L	220-240V/ 50-60Hz	0.8	14-20 knives	355*203*292
CMM-17L2			1.7L*2=3.4L	
CMM-8LM	220-240V/ 50-60Hz	1	8L	385*353*292
CMM-4L2M			4L*2=8L	
CMM-74L			4L*1+1.7L*2=7.4L	
CMM-17L4M			1.7L*4=6.8L	
CMM-8LD	220-240V/ 50-60Hz	1	8L	385*353*292
CMM-17L4D			1.7L*4=6.8L	385*353*292
CMM-4L3D			4L*3=12L	565*353*292
CMM-16LD			6L*1+2.5L*4=16L	565*353*292

MODEL CMM-17L4M



MODEL CMM-8LD




MODEL CMM-17L2



Chocolate Melter

- Stainless steel 201 structure ensure longer life
- Stainless steel heating tube provide quick heat-up
- Digital display panel, more scientific and fashionable
- Can realize automatic constant temperature
- Thick high-quality chocolate pan, humanized design

OPTION

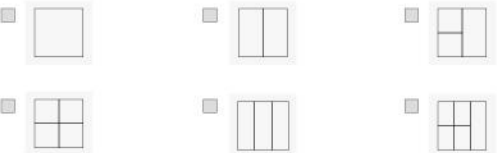

Model	Voltage	Power(kW)	Capacity	Size(mm)
CMM-1QH	220-240V/ 50-60Hz	0.5	12KG	465*355*260
CMM-2QH			6KG*2=12 KG	465*355*260
CMM-4QH			3KG*4	465*355*260
CMM-1QD	220-240V/ 50-60Hz	1	8KG	485*360*180
CMM-2QD				
CMM-4QD			12KG	665*360*180
CMM-3QD				
CMM-5QD				
CMM-6QD				
CMM-01	220-240V/ 50-60Hz	0.04	1KG	230*170*110
CMM-02		0.04+0.04	1KG+1KG	350*230*110

MODEL CMM-8LM



MODEL CMM-2QD



MODEL CMM-02



MODEL CMM-01



MODEL CMM-4L



Sauce Cheese Warmer

- Body material **SS430**, bowl material **SS304** structure ensure longer life
- **U-shaped** heating tube provide more quick and evenly heat-up
- Work as an ideal dispenser for **Caramel, Chili, Sauce, Gravy** and warming cheese etc
- Cook and preserve the sauce at a regular temperature



Model	Voltage	Power(kW)	Size(mm)
CW-4.4B	220-240V/50-60Hz	0.5	206*394*382
CW-4.4A		0.5	230*420*388
CW-Q1		0.3	180*240*365
CW-Q2		0.3	350*240*365
CW-Q3		0.3	350*230*380

MODEL CW-4.4A



Sauce Cheese Warmer

- **Stainless Steel** heating tube provide more quick heat-up
- Antirust **stainless steel 201** structure ensure longer life
- **Non-skid rubber feet** prevent slipping
- Small appearance, high-end, practical
- When the body is heated, the bottom of the machine is not hot.



Model	Voltage	Power(kW)	Size(mm)
SW-1S	220-240V/50-60Hz	0.16	140*195*230
SW-2S		0.32	285*195*230
SW-3S		0.48	430*195*230
SW-4S		0.64	576*195*230

MODEL SW-1



MODEL CW-4.4B



6 levels heating power adjustable: 35°C/51°C/63°C/74°C/85°C/99°C



Simple operation, better control of the number of copies



Ensures that the sauce is hot from start to finish

Stainless Steel Condiment Dispenser

- Antirust **stainless steel 201** structure ensure longer life
- **Non-skid rubber feet** prevent slipping
- **Fixed pump head** can effectively prevent leakage
- **Large capacity**, enough seasoning can be put in at one time
- Can be used in sauces such as soy sauce, vinegar, tomato sauce, chocolate sauce, salad dressing, etc.

MODEL MCD80211

Model	Capacity(L)	Size(mm)
MCD80211	3	184*186*255
MCD80212	3x2	364*186*255
MCD80213	3x3	544*186*255



Electric Soup Kettles

- Stainless Steel heating tube provide more quick heat-up
- Convenient lifting ring design smooth edges without cutting hands, safer lifting
- Large capacity of 10 liters, durable, attractive and easy to clean
- Red light indicates heating
- Non-skid rubber feet prevent slipping



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
SK-10	220-240V/50~60Hz	0.4	10	340*340*370
SK-10S				

MODEL SK-10



MODEL CW-6



French Fry Warmer Station

- U-shaped heating tube provide more quick and evenly heat-up
- Antirust stainless steel 201 structure ensure longer life
- Automatic constant temperature accurate temperature 40-70°C,keep food warm and no water loss
- Non-skid rubber feet prevent slipping



Model	Voltage	Power(kW)	Size(mm)
CW-1/1	220-240V/50~60Hz	0.6	340*570*437
CW-560		0.8	560*600*650
CW-6		1.1	600*700*1650
801	/	/	520*375*140
802		/	520*490*140

MODEL 801 French Fries Slot



MODEL CW-560



MODEL CW-1/1



Easily adjust the temperature 35-80 °C



Hanging upside down on the side saves time and space



Convenient and fast
Not afraid of falling onto the pot



Antirust stainless steel 201 structure ensure longer life

MODEL SK-10S



Food Heat Lamp

- High-quality electroplating lampshade, sturdy and durable, high temperature resistance, no deformation
- Long-lasting heat preservation, lock in the original flavor
- Stainless steel U-shaped chassis, not easy to rust, hygienic and healthy
- Can enhance the food display effect, and at the same time play a role of sterilization



Model	Voltage	Power(kW)	Size(mm)
CW-250	220-240V/50-60Hz	0.25	490*370*280
CW-500		0.5	495*360*600
CW-750		0.75	740*335*790

MARCHEF warmer heating lamps have a simple design and a sturdy structure, which can provide you with a reliable way to keep fried foods hot without drying them out. This kind of heating lamp comes with a "C-shaped base" that can accommodate a full-size food pan, and the height is adjustable, so you can find the ideal temperature for each type of food.



Independent switch, safer to use



waterproof, explosion-proof, safer and more environmentally friendly



It can dissipate the light bulb and prolong its service life

MODEL CW-500



MODEL CW-750



Model	Voltage	Power(kW)	Size(mm)
FDW-1P	220-240V/50-60Hz	0.6	350*350*520
FDW-1PD		1.2	670*360*520
FDW-2P		0.8	660*460*600
FDW-3P		1	950*460*600
FDW-4P		1.6	1240*460*600
FDW-2PS		0.8	660*460*600
FDW-3PS		1	950*460*600
FDW-4PS		1.6	1240*460*600



FDW-3PS



Easily adjust the temperature 30-85 °C



Orange light indicates heating



Waterproof heating, heat preservation faster and more uniform



Observe the temperature changes in the warmer at any time to prevent the temperature from overheating or too low

Food Warmer



- Stainless Steel heating tube provide more quick heat-up
- Antirust SS201 structure ensure longer life
- Non-skid rubber feet prevent slipping
- Use highly transparent toughened glass, high temperature resistance, high impact resistance.
- Separate from temperature, easy to control independent light switch.
- Interior lighting show the best state of food.



FDW-2P

MODEL FDW-1P



MODEL FDW-1PD



Model	Voltage	Power(kW)	Size(mm)
FDW-701	220-240V/50~60Hz	1	380*450*590
FDW-702		1.5	660*450*590
FDW-703		1.8	890*450*590
FDW-704		2	1200*450*590
FDW-604		0.8	380*490*645
FDW-601		1.2	660*490*645
FDW-602		1.5	900*490*645
FDW-603		2	1200*490*645

MODEL FDW-604



Food Warmer



- Stainless Steel heating tube provide more quick heat-up
- Antirust SS201 structure ensure longer life
- Non-skid rubber feet prevent slipping
- Use highly transparent toughened glass, high temperature resistance, high impact resistance.
- Separate from temperature, easy to control independent light switch.
- Interior lighting show the best state of food.

MODEL FDW-602



Cup/Plate Warmer



MODEL MCW-1

- All Stainless Steel Body; Convection Heating Mode
- Even Temperature Control; New design of handle of trolley,feel more comfortable.
- More safe with water-proof switch.
- The body is made of stainless steel,good quality.

Model	Voltage	Power(kW)	Size(mm)
MCW-1	220-240V/50~60Hz	0.14	360*250*550
MCW-2		0.14	360*320*550
PW-60		0.6	390*560*770
PW-120		1	600*560*770
PW-101		0.4	450*485*930
PW-102		0.8	450*910*930
FW-11S		2.62	790*975*1795
FW-22S		5.24	1540*975*1795



PW-102



FW-11S



FW-22S



Easily adjust the temperature 0-85℃



Observe the temperature changes in the warmer at any time to prevent the temperature from overheating or too low.



Slide the rail door left and right for easy food placement

MODEL FDW-704



Thermostat, Thermostatically controlled, Maximum temperature 80℃



Adjustable drawer board offer versatility. Heating plate, Distributed heating range, even heating



The wheels can be fixed to prevent forward and backward movement

MODEL PW-60




Knife Steriliser

- Stainless steel UV lamp sterilization knife box has good heat insulation effect and excellent energy saving performance
- Using mirror polishing technology, bright can illuminate people, green and environmental protection
- Wall-hung hole design, you can choose wall-mounted installation or table placement
- UV lamp with metal mesh protection




Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
MKS-14	220-240V/50-60Hz	0.015	14-20 knives	510*160*600

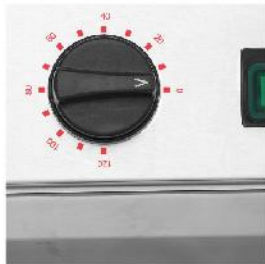

Set a time 0-120mins for reminder, Meet a variety of disinfection needs.



The edges and corners are round and do not hurt your hands.

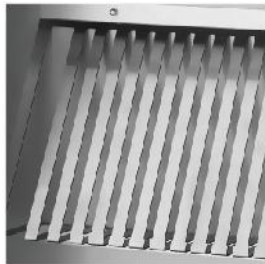

Strong suction makes the product firmer in the working process



Thick stainless steel, compressive and not deformed

MODEL MKS-14



Pasta Cooker

- Antirust stainless steel 201 structure ensure longer life
- Stainless Steel heating tube provide more quick heat-up
- Cabinet is insulated to prevent heat dissipation
- Smoke exhaust pipe is located on the top of the machine. When opened, steam and smoke can escape
- laminated shelf size 395*320mm
- Distance between each shelves:11cm



Model	Voltage	Power(kW)	No. of Baskets	Size(mm)
EPC-4T	220-240V/50-60Hz	2x2	4	430*580*410
EPC-6T		2x2x2	6	600*580*410
Model	Pressure	Used Gas	No. of Baskets	Size(mm)
GPC-4T	2800/2000Pa	LPG/Natural Gas	4	430*580*410
GPC-6T			6	600*580*410



EPC-4L-2



EPC-6T



EPC-2T

Model	Voltage	Power(kW)	No. of Baskets	Size(mm)
EPC-2T	220-240V/50-60Hz	4.5	2	400*680*370
EPC-8L		2.8	4	266*470*364
EPC-4L		2	2	175*400*305
EPC-4L-2	220-240V/50-60Hz	2x2	4	350*400*305
EPC-4		1.5x1.5	4	450*480*285
EPC-6		2x2x2	6	690*480*285

MODEL EPC-4T



MODEL EPC-8L



Water Tap Easy to drain and clean



Digital temperature display
Smart display temperature



Water Boiler

- Multi-stage temperature control, free adjustment of water temperature
- Rapid boiling, heating in the whole chassis, meeting commercial needs
- Overheating protection, automatically power off if the temperature is too high
- Long-term heat preservation can save energy and electricity
- Large capacity for drinking water for many people



Insulation and anti-scald, safe to use, not easy to burn



Exhaust decompression to ensure the safety of boiling water



Stainless steel inner tank, full chassis heating method

MODEL WB-10S



MODEL WB-15LD



Model	Voltage	Power(W)	Max/Full Capacity(L)	Size(mm)
WB-6LD	220-240V/ 50~60Hz	1500	6/7	230*230*420
WB-7LD		1500	7/8	230*230*440
WB-8LD		1500	8/9	230*230*472
WB-10LD		1500	9/10	230*230*510
WB-15LD		2500	14/14.5	290*290*485
WB-18LD		2500	16/18	290*290*515
WB-22LD		2500	20/22	290*290*580
WB-25LD		2500	23/25	290*290*643
WB-8S		2500	8	190*240*520
WB-10S		2500	10	190*240*650

MODEL WB-8S



Coffee Maker

- Multi-stage temperature control, free adjustment of water temperature
- Rapid boiling, heating in the whole chassis, meeting commercial needs
- Overheating protection, automatically power off if the temperature is too high
- Long-term heat preservation can save energy and electricity
- Large capacity for drinking for many people



Model	Voltage	Power(W)	Rate/Full Cap	Size(mm)
CB-8LS	220-240V/ 50~60Hz	950	5.6L/8.9L	Dia.220xH:412
CB-9LS		950	6.3L/9.7L	Dia.220xH:452
CB-10LS		950	7.6L/10.9L	Dia.220xH:498
CB-11LS		950	8.5L/11.8L	Dia.220xH:500
CB-18LS		1500	12.7L/18.4L	Dia.290xH:452
CB-21LS		1500	14.7L/21L	Dia.290xH:498
CB-25LS		1500	19.3L/25.1L	Dia.290xH:558
CB-8LD	220-240V/ 50~60Hz	950	5.1L/8.3L	Dia.290xH:420
CB-9LD		950	5.7L/8.8L	Dia.290xH:437
CB-10LD		950	6.9L/10L	Dia.290xH:472
CB-11LD		950	7.8L/10.9L	Dia.290xH:504
CB-12LD		1500	11.3L/12.9L	Dia.290xH:485
CB-19LD		1500	13.8L/19.6L	Dia.290xH:517
CB-23LD		1500	18.2L/23.7L	Dia.290xH:581
CFM-2086	220-240V/ 50~60Hz	2060	20.5/23.8L	515*260*505
CFM-0001		2060	2.2L	515*260*640


MODEL CFM-2086



MODEL CB-7LD



Can well detect the degree of water use



Insulation and anti-scald, safe to use, not easy to burn

MODEL CFM-0001



Coffee Grinder

- Low noise motor design, high efficiency, fast and quiet grinding
- Grinding gear discs, high productivity, fast grinding
- Simple grinding operation, easy cleaning and maintenance
- The body is made of aluminum, not easy to damage



Model	Voltage	Power(W)	Capacity	Size(mm)
MCG-600AB	220-240V/50~60Hz	350	7-12KG/H	360*250*580
MCG-600AC				360*250*580
MCG-600AD				300*210*560
MCG-650AB				330*240*640
MCG-700AB				300*210*560
MCG-700AC				220*240*580
MCG-700AD	180	3-6KG/H		220*275*580
MCG-800				230*145*450



MODEL MCG-600AC



Control the grinding thickness without weight



Adjustable powder thickness



High-quality stainless steel grinding disc, easy to clean



Can preserve the coffee's moisturizing aroma, professional ultra-fine grinding

MODEL MCG-650AB



MODEL MCG-600AD



MODEL MCG-700AD



MODEL MCG-800



MODEL MCG-700AC



Model	Voltage	Power(W)	Capacity	Size(mm)
MS-1	220-240V/50~60Hz	80	1	190*160*530
MS-2		80+80	1+1	230*230*530
MS-1A		300	1	170*170*530
MS-2B		150	1	180*160*550



MS-1A



MS-2B

Milk Shaker

- Antirust stainless steel 201 structure ensure longer life
- Non-skid rubber feet prevent slipping
- Stainless steel motor cover has high pressure resistance and damage resistance, protecting the motor from damage
- Thickened main body and base firmly support the entire machine



MS-1



MS-1

Sous Vide

- Antirust stainless steel 201 structure ensure longer life
- Non-skid rubber feet prevent slipping
- Stainless steel motor cover has high pressure resistance and damage resistance, protecting the motor from damage
- Thickened main body and base firmly support the entire machine



Model	Voltage	Power(kW)	Capacity	Size(mm)
SC-16L	230V/50Hz	0.5	16L	360*400*300
SC-22L		0.7	22L	620*360*300
SV-03A	220-240V/50-60Hz	1.5	/	140*110*330




MODEL SV-03A



MODEL	SC-22L
--------------	---------------



MODEL SC-16L



Smart induction design, install the cup, and start immediately. Automatically stop when the cup is removed.



360 ° stir evenly and double disc design make the mixing more quickly



Stainless steel material,
environmentally friendly,
healthy, easy to clean



Silicone cup holder, high strength



MODEL MS-2



Humanized simple operation,
microcomputer display



Easy to clean, safe and healthy




Waterproof heating, heat preservation faster and more uniform



Seamless mold cylinder

Gas Shawarma Grill

- Stainless steel material which is safe and rustproof; Easy to use and convenient
- High-performance Motor Brings Uniform Baking
- Skewer can rotate left and right
- Plastic handle to avoid scratches
- Inbuilt drip tray keeps machine clean and mess-free

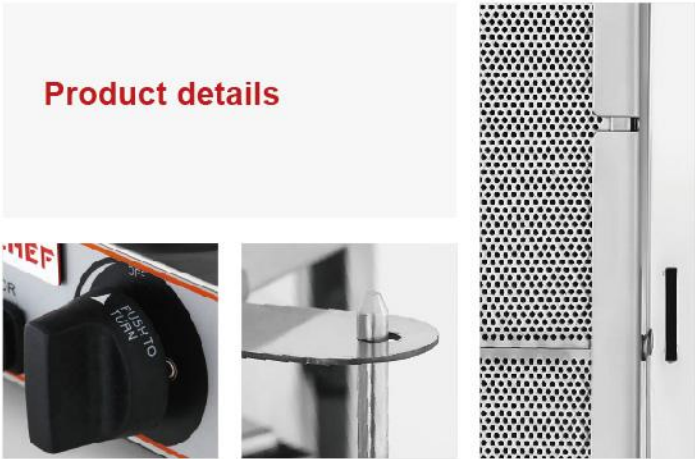

MODEL GS-2XL



MODEL GS-2L



MODEL GS-2S



Model	Pressure	Used Gas	Size(mm)
GS-2S	2800/2000Pa	LPG/ Natural Gas	295*300*490
GS-2M			540*650*950
GS-2L			540*650*1050
GS-2XL			540*650*1220
TGS-4			650*600*1770

MODEL GS-2M




Food Smoker

- Antirust stainless steel 201 structure ensure longer life
- Stainless Steel heating tube provide more quick heat-up
- Cabinet is insulated to prevent heat dissipation
- Smoke exhaust pipe is located on the top of the machine. When opened, steam and smoke can escape
- laminated shelf size 395*320mm
- Distance between each shelves:11cm



Model	Voltage	Power(W)	Size(mm)
YXL-70L	220-240V/50~60Hz	1022	L (490+100mm) *W410*H985
YXL-140L			L (490+100mm) *W440*H1300



Set a time 0-120mins for reminder



Easily adjust the temperature 30-135℃



Observe the temperature changes in the warmer at any time to prevent the temperature from overheating or too low



Easily deal with the large passenger flow, so that customers will not wait long

MODEL YXL-70L



MODEL YXL-140L

